




Rev02 17/08/2020

CTRL is the range of 36V DC digital controllers installed with the barrier applications.

1. bekabelingschema

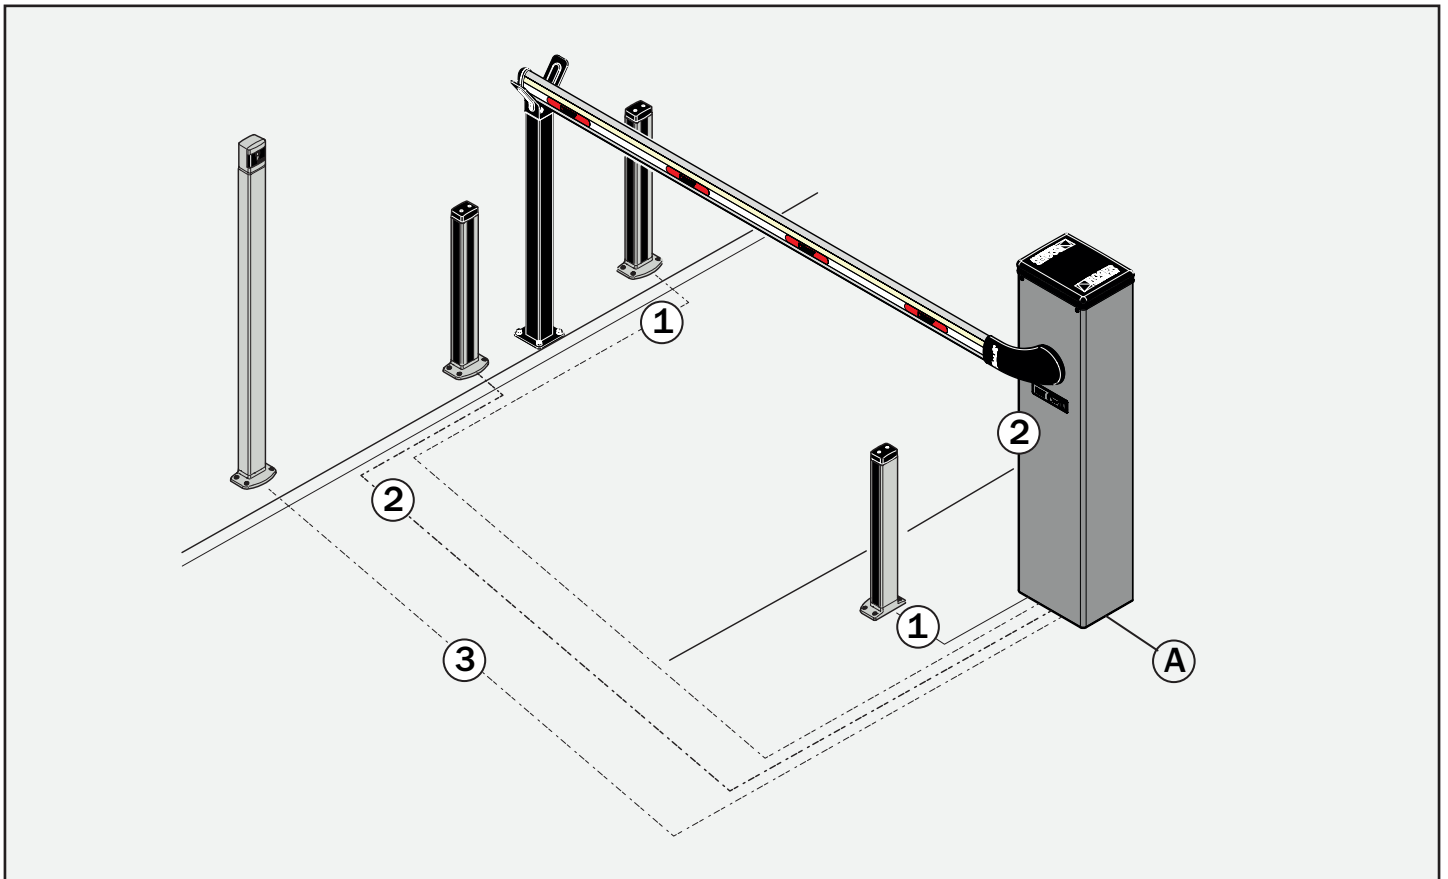

(A)	VOEDING	XVB 3G2,5
(1)	FOTOCEL 1	SVV 6x0,8
(2)	FOTOCEL 2	SVV 6x0,8
(3)	SLEUTELCONTACT OF CODEKLAVIER	SVV 14x0,8 <50m of LIYY 14x0,8 >50m of UTP zwart 4 paar cat 5